

# **LIGHT SOURCE**

**Patent number:** WO03075309  
**Publication date:** 2003-09-12  
**Inventor:** KRAUS ALBRECHT (DE); BACHMANN PETER KLAUS (DE)  
**Applicant:** PHILIPS INTELLECTUAL PROPERTY (DE); KONINKL PHILIPS ELECTRONICS NV (NL); KRAUS ALBRECHT (DE); BACHMANN PETER KLAUS (DE)  
**Classification:**  
- International: C23C16/01; C23C16/27; H01J1/46; H01J9/24; H01J21/10; H01J61/00; H01J63/02; H01J63/08; C23C16/00; C23C16/26; H01J1/00; H01J9/24; H01J21/00; H01J61/00; H01J63/00; (IPC1-7): H01J61/00  
- european: H01J9/24D2; H01J63/02; H01J63/08  
**Application number:** WO2003IB00733 20030226  
**Priority number(s):** DE20021010045 20020307

**Also published as:**

WO03075309 (A3)  
EP1502281 (A3)  
EP1502281 (A2)  
US2005093418 (A1)  
CN1643648 (A)

more >>


**Cited documents:**

DE19821939  
EP0442303  
US6052401  
DE4438407  
JP1073720

Report a data error here

## **Abstract of WO03075309**

The invention relates to a light source (1) with a discharge vessel (2) which is filled with a filling gas, and with an electron beam source (4) arranged in vacuum or in a region of low pressure, which source (4) generates electrons (12) and propels them through an inlet foil (8) into the discharge vessel (2). According to the invention, the inlet foil (8) comprises a diamond layer.

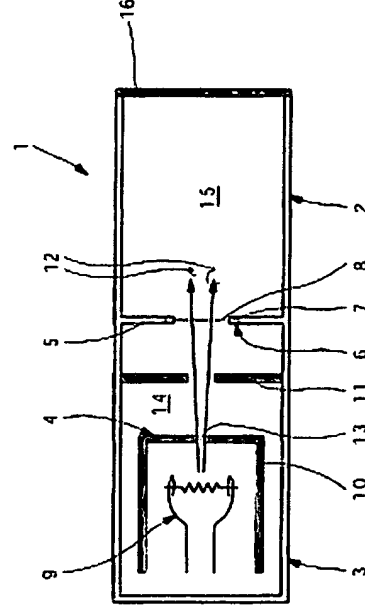

Data supplied from the [esp@cenet](http://v3.espacenet.com/textdoc?DB=EPODOC&IDX=WO03075309&F=8&QPN=WO03075309) database - Worldwide

